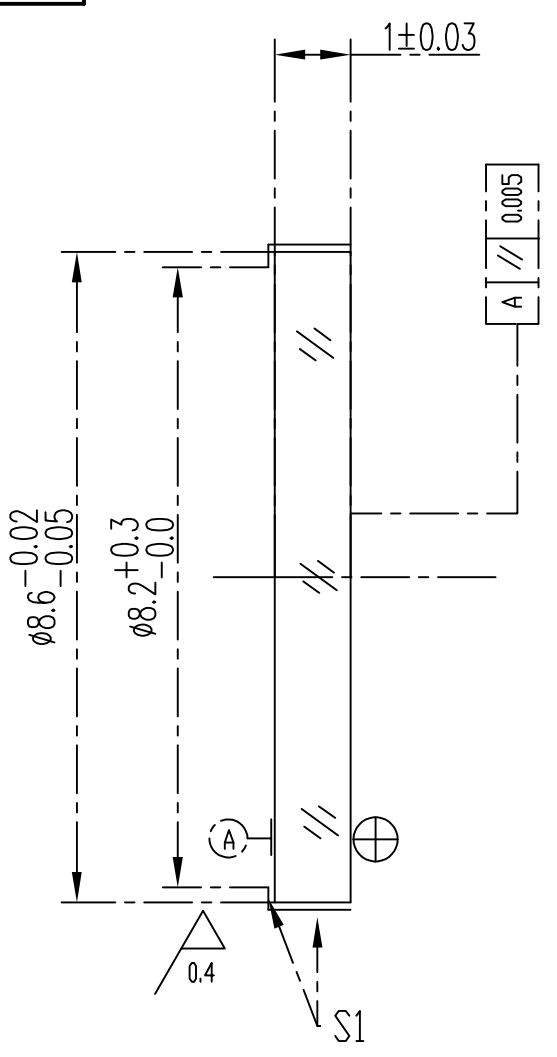


会 签											
		精 饰 和 表 面 处 理									
		⊕ 增透膜 GB1316-88		其余 $\nabla_{0.012}$							
		镀膜要求见镀膜文件									
		对 材 料 的 要 求									
		Δn_d 2C									
		Δv_d 2C									
		光学均匀性 3									
		光吸收系数 3									
		应力双折射 2									
		条纹度 1C									
		气泡度(q) 2C									
		对 零 件 的 要 求									
		N 2									
		ΔN 0.3									
		ΔR A									
		C									
		B 60-40									
		x									
		L_f									
		L_f'									
		D_{01} $\phi 7.4$									
		D_{02} $\phi 7.2$									
		技术要求:									
		1. 崩边小于0.1;									
		2. 保护性倒角0.1X45°;									
		3. 晶轴方向垂直于窗口端面(平面A);									
		4. 面S1进行金属化(镀铬镍金);									
责任	签字										
制图											
描图											
描校											
旧 总 图 底 号		标记	数量	文 件 号	签 字	日期	名称:	图号	990-000101-00		
底 图 总 号		设 计					后窗蓝宝石	图 样 标 记		重 量	比 例
		校 对						S			10:1
		审 查									
日期		标准检查					材料:	共 页		第 页	
		工艺检查									
		质量会签									
		批 准					玻璃 光学级蓝宝石				