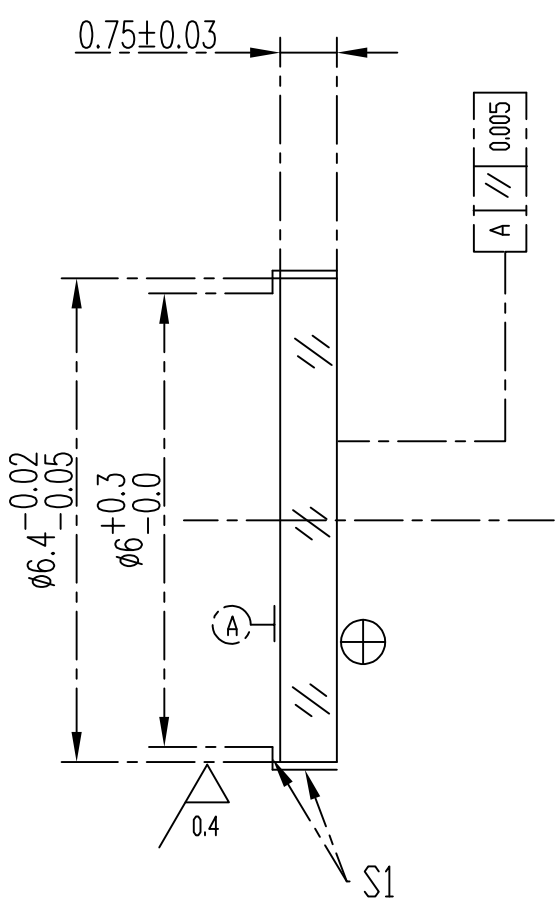


会 签											
		精 饰 和 表 面 处 理									
		⊕ 增透膜 GB1316-88		其余 $\nabla \frac{0.012}{}$							
		镀膜要求见镀膜文件									
		对 材 料 的 要 求									
		Δn_d	2C								
		Δv_d	2C								
		光学均匀性	3								
		光吸收系数	3								
		应力双折射	2								
		条纹度	1C								
		气泡度(q)	2C								
		对 零 件 的 要 求									
		N	2								
		ΔN	0.3								
		ΔR	A								
		C									
B	60-40										
x											
L_f											
L_f'											
D_{01}	$\phi 5.8$										
D_{02}	$\phi 5.2$										
											
				技术要求: 1. 崩边小于0.1; 2. 保护性倒角0.1X45°; 3. 晶轴方向垂直于窗口端面(平面A); 4. S1表面进行金属化(镀铬镀金);							
责任	签字										
制图											
描图											
描校											
旧 总 图 底 号		标记	数量	文 件 号	签 字	日期	名称:	图号		990-000100-00	
底 图 总 号		设 计					前窗蓝宝石	图 样 标 记		重 量	比 例
		校 对						S			10:1
		审 查						共	页	第	页
日期		标准检查					材料: 玻璃 光学级蓝宝石				
		工艺检查									
		质量会签									
		批 准									